

FIXED DOCK SEAL WITH HEAD PAD OR HEAD CURTAIN



PROVIDES SEAL BETWEEN THE INTERIOR AND EXTERIOR OF THE OPENING

This seal helps keep out weather and saves on heating/cooling costs. The trailer compresses the foam top pad and side columns of this seal.

High Quality Construction

- The fabric is double stitched with high strength polyester thread that has been UV treated for long term durability.
- The columns and top pad have premium grade foam with full compression and recovery properties in temperatures as low as -40°F.
- Vent openings drain moisture and promote air circulation for compression in the vertical columns and top pad.

Fabric Advantages

- Available in multiple weights including a premium 40 oz fabric that has 6 times more abrasion resistance.
- All fabrics are treated with UV protection to help prevent fading.

Additional Trailer Impact and Abrasion Protection

- Optional column wear pleats provide additional tearing and abrasion protection.
- Heavy duty 66 oz wear pleats on the top and bottom corners also available.

Optional 4 Sided Weather Protection

- At docks where there is no leveler, a bottom seal pad can provide a seal on all four sides of the opening along way the side columns and top pad.


1-Year Limited Warranty



IDEAL SEAL
— MANUFACTURING —

802. E. Owassa Road Pharr, Texas 78577



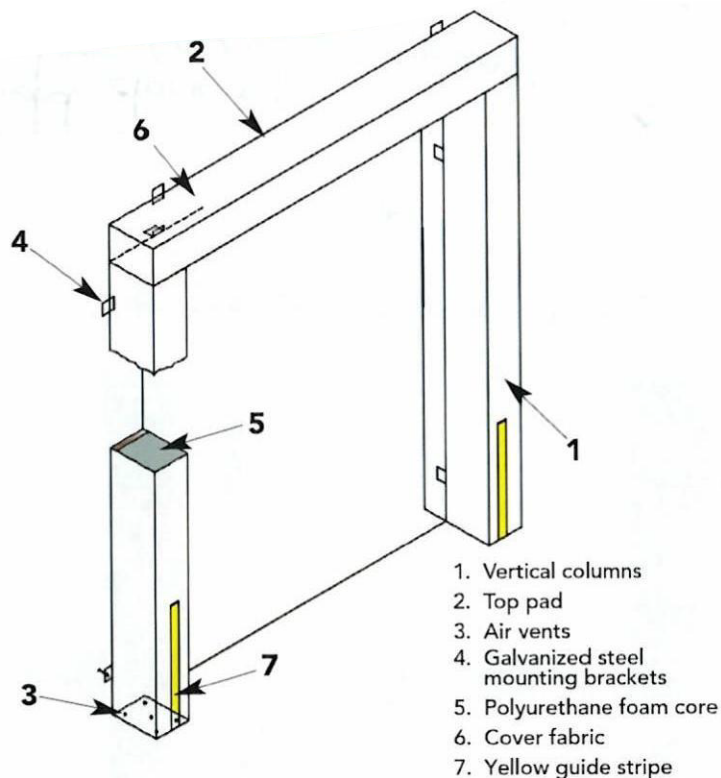

BACK COLUMN WIDTH	FRONT COLUMN WIDTH
10"	10"
12"	12"
8"	11"
8"	15"
12"	15"
12"	18"
12"	23"

DIMENSIONS	STANDARD	OPTIONAL
Column Height 8'	✓	
Column Height 7'6" to 9'		✓
Top Pad 12 High	✓	
Taller Top Pad 15" or 18"		✓
Top Pad Width 6'4" to 11"		✓
CURTAIN		
Velcro Hold Curtain Fabric or PVC (Drop: 12"/18"/24")		✓
PROJECTION		
Projection 10	✓	
Other Projection 8"-20"		✓
Projection Box 4/6/8/10/12		✓
Taper Projection 8°-20° top or bottom		✓
FABRIC WEIGHT & COLOR		
22 oz (Black, Blue, Gray, Green, Brown)	✓	
40 oz Regular (Black, Blue, Gray, Green, Red, Brown)		✓
40 oz Premium (Black)		✓
DOUBLE LAYER FABRIC		
* Double layer of fabric on impact area of columns		✓
FRAME		
Treated Lumber	✓	
DRAFT CONTROL		
Two bottom draft flaps	✓	
BOTTOM SEAL PAD		
4' or 8' Long		✓
GUIDE STRIPES		
24 High	✓	
Full Height		✓
MOUNTING		
Galvanized Mounting Hardware	✓	
SCUFF GUARDS		
Scuff Guards (40 oz Premium, Black)		✓
48" tall additional layer of fabric inside columns		✓
SECURITY SEAL		
4 or 8' High		✓
WEAR PLEATS		
Wear Pleats 4/8/16" Exposure (same weight/color available as above) 22oz	✓	
Wear Pleats 4/8/16" Exposure (same weight/color available as above) 40oz		✓
Heavy Duty 66 oz Top and Bottom Corner Pleats, 4" exposure (Black, Blue, Orange)		✓



IDEAL SEAL
— MANUFACTURING —

802. E. Owassa Road Pharr, Texas 78577

