



IDEAL SEAL
— MANUFACTURING —

ISM 1010 Foam Dock Seal with Head Curtain

Product Specifications



DESIGN HIGHLIGHTS

- Top of hood is tapered forward and securely fastened to the building wall
- Fiberglass stays add stiffness to hood top to prevent sagging
- Hood curtain splits offer load relief and higher clearance
- Endurance tested foam core is continuously bonded to frame surface with flexible, non-flammable adhesive
- A wide selection of durable coated fabrics provide maximum durability
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release
- Full length yellow stripes guide drivers to the dock
- Hood curtain splits offer load relief and higher clearance

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No Rear step section: Yes No

Tailgate/step section size: _____ in Yard jockeys: Yes No

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

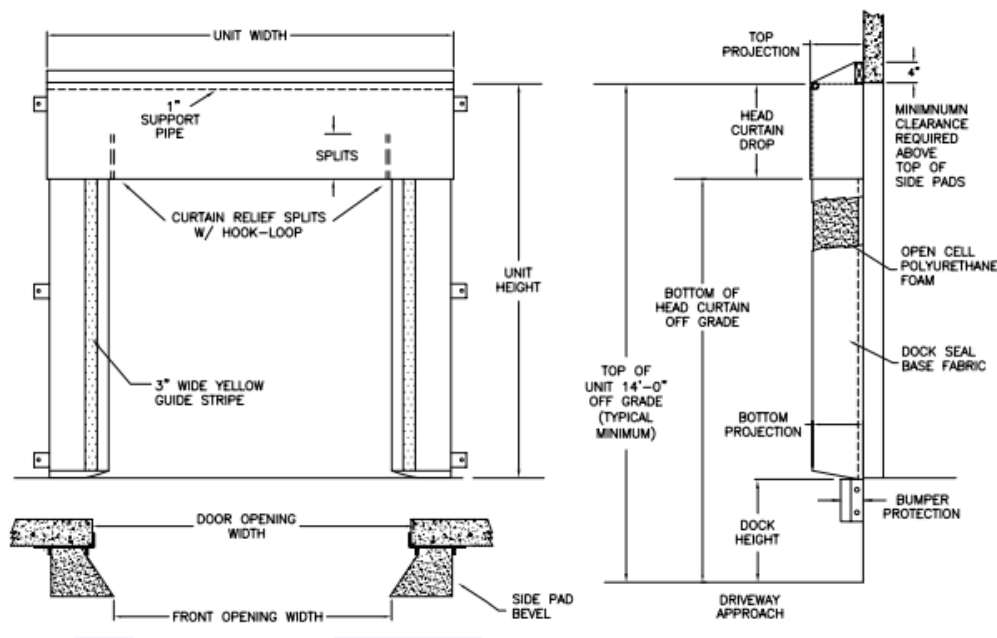

Quantity _____ Unit Width: _____ (Total inches)

Head Curtain Height: ☐ 18" ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ _____

Head Curtain Splits: ☐ 12" ☐ 18" ☐ 24" ☐ 30" ☐ 36" ☐ _____

Head Curtain Options: ☐ None ☐ Pull-rope assy ☐ O-rings ☐ 2" foam front ☐ Sectional foam front

Side Pad Height: _____ (Total inches)

Side Pad Back/Face: ☐ 6/10 ☐ 8/12 ☐ 10/12 ☐ 12/12 ☐ 12/15 ☐ 8/15 ☐ 6/14 ☐ 10/18 ☐ 8/23

Base Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Taper: ☐ Tapered ☐ Non-Tapered

Top Projection: ☐ 8" ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22" ☐ _____

Bottom Projection: ☐ 8" ☐ 10" ☐ 12" ☐ 14" ☐ 16" ☐ 18" ☐ 20" ☐ 22" ☐ _____

Blockout: ☐ None Blockout Projection: ☐ 2" ☐ 4" ☐ 6" ☐ 8" ☐ 10" ☐ 12" ☐ _____

Wear Pleats: ☐ None ☐ 4" ☐ 8" ☐ 16" ☐ Head and side pads ☐ Head pad corners

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Wear Face: ☐ None ☐ Head pad ☐ Side pad

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Reinforced Inside Face: ☐ None ☐ Side pad 4" ☐ Side full height

Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Options: ☐ Door numbers ☐ 24" Guide stripes ☐ Flame retardant fabric ☐ Flame retardant foam

Bottom Flaps: ☐ 3" ☐ 6" ☐ _____ Bottom Flaps Location: ☐ Inside ☐ Inside & front ☐ All sides

Side Pad Mounting Brackets: ☐ None ☐ Flats & angles ☐ Angles ☐ 1 1/2" Offsets & angles

*Note: Consult factory for blockout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



IDEAL SEAL MANUFACTURING
(956) 784-9145
Engineering@idealsealmfg.com
Edinburg, Texas