

# Bar Lift Barrier


## Specification Sheet & Submittal

### Standard Features

|   |  |
|---|--|
| Push-button activation                                      | Prevents forklift trucks from driving off the edge of the loading dock |
| Protects overhead door                                      | Rated to withstand 10,000 lbs of force at 4 mph                        |
| Protects door track and jamb while in the vertical position | Designed and manufactured in the USA                                   |
| 1-1/2 HP self-contained power unit                          |  |

### General Description

McGuire's Bar Lift Barrier prevents lift trucks from driving over the dock's edge. Hydraulic operation provides years of trouble-free service. Units can be installed with mechanical, pneumatic, and hydraulic dock levelers or where no levelers are present. The Bar Lift Barrier is rated to withstand impacts from a 10,000 lb load moving at 4 mph. Standard unit (including stanchion, arm and receiver pocket): 12'1" wide. Customized widths available. Gusseted models also available to prevent fork damage to bottom panel of overhead door. Unit ships with anchors needed for installation.

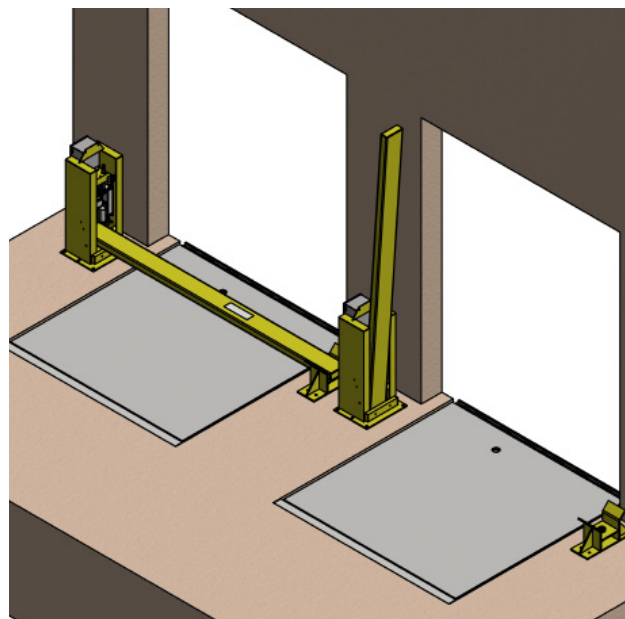

### Common Options

- Interlock with dock leveler
- Three-phase electrical
- Fork under-ride protection
- Special paints

### Order Specifications

#### Required Information

|                 |  |
|-----------------|--|
| CUSTOMER        |  |
| JOB             |  |
| LOCATION        |  |
| NUMBER OF UNITS |  |
| MODEL           |  |
| SIZE            |  |
| REPRESENTED BY  |  |
| SALES REP       |  |

#### Certified for Construction

|                 |  |
|-----------------|--|
| BY              |  |
| DATE            |  |
| COMPANY         |  |
| CITY & STATE    |  |
| VOLTAGE / PHASE |  |
| DRAWING #       |  |