




MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
591	35' 2"	24' 1"

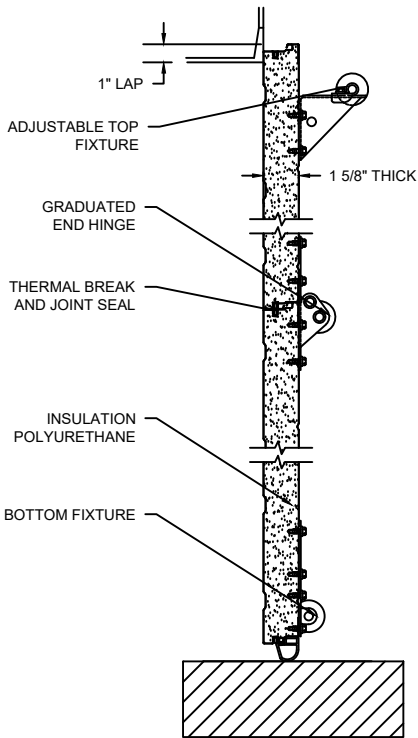

SECTION B-B

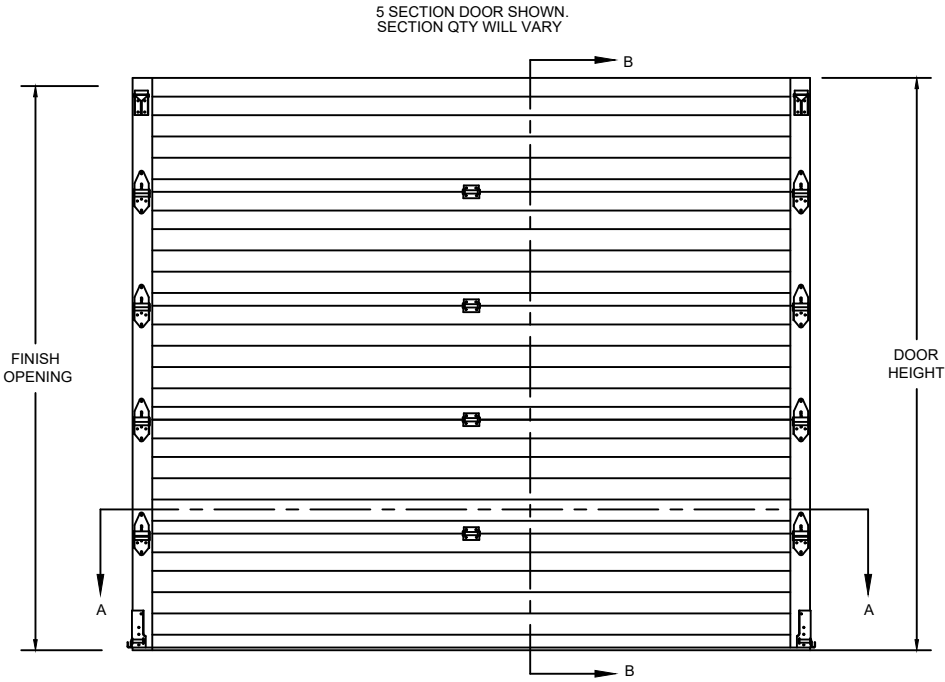

ELEVATION

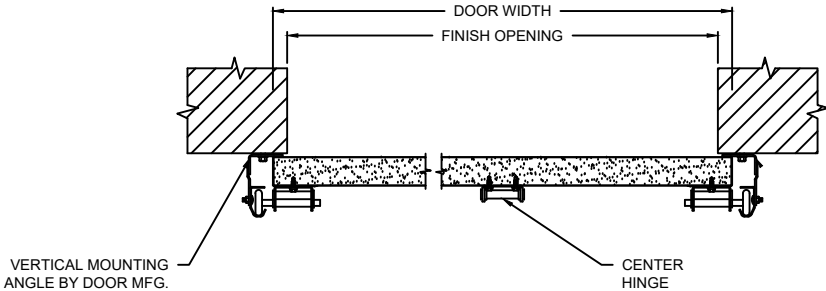

SECTION A-A

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
ROLLER TRACK SIZE	☐ 2" ☐ 3"
END STILES	☐ SINGLE ☐ DOUBLE
WINDOW OPTIONS	☐ NO WINDOW ☐ ONE - 24" X 7" ☐ TWO - 24" X 7" ☐ THREE - 24" X 7" ☐ ONE - 25" X 12" ☐ TWO - 25" X 12" ☐ THREE - 25" X 12" ☐ FULL VIEW 2 PANEL ☐ FULL VIEW 3 PANEL
SEAL OPTIONS	☐ JAMB SEAL ☐ STANDARD BOTTOM SEAL ☐ TOP SEAL ☐ ELECTRIC SAFETY EDGE ☐ PNEUMATIC SAFETY EDGE ☐ VINYL STOP MOLD
LOCK OPTIONS	☐ SLIDE LOCK ☐ UNILOCK CENTER 2 ROD

COMPONENT	MATERIAL	OPERATION	NOTES:
SECTIONS	ROLL-FORMED, HOT DIPPED, GALVANIZED	MANUAL	- THE INSULATION WILL HAVE A U-FACTOR OF 0.13 (R-VALUE OF 14.86). U-FACTOR VALUES ARE INDEPENDENTLY TESTED AND VERIFIED PER ANSI/DASMA 105. OVERHEAD DOOR™ BRAND USES A CALCULATED DOOR SECTION R-VALUE FOR OUR INSULATED DOORS. THIS DOOR FEATURES TESTED AIR INFILTRATION AT 25 MPH (40 KMPH) OF .08 CFM/FT2 (1.46 M3/HR/M2).
END STILES	16 GA. STEEL		
HARDWARE	GALVANIZED STEEL		
WEATHERSTRIP	EPDM RUBBER		

THERMACORE®

591 SECTIONAL STEEL DOORS (INSULATED)

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	