

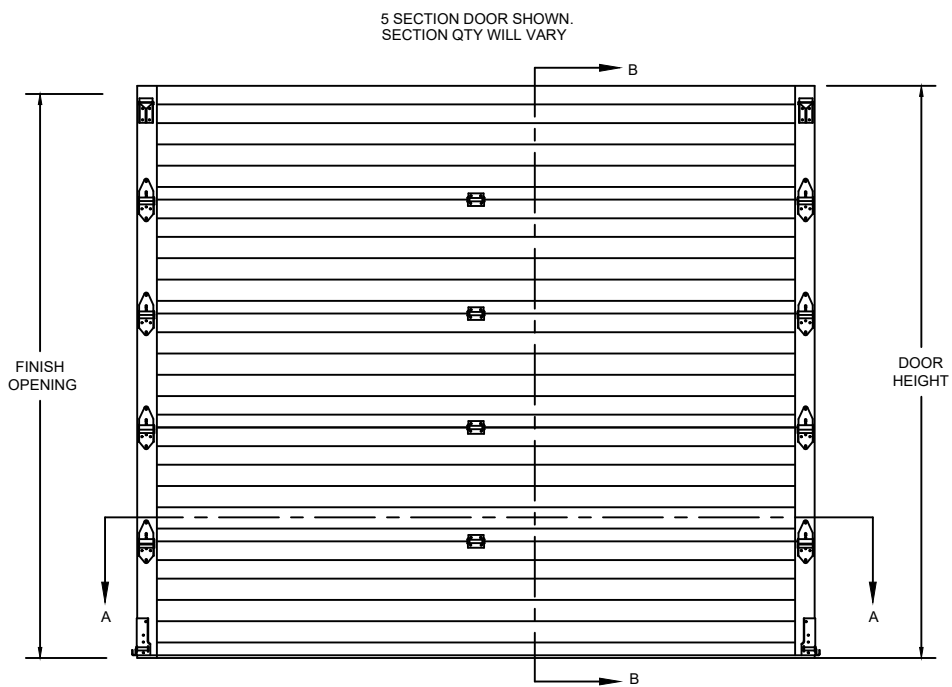


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
598	16' 2"	14' 1"

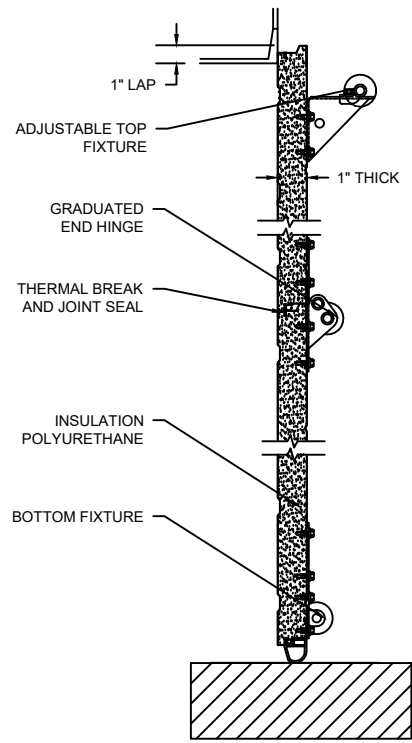

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
ROLLER TRACK SIZE	☐ 2"
END STILES	☐ SINGLE
WINDOW OPTIONS	☐ NO WINDOW ☐ ONE - 25" X 12" ☐ TWO - 25" X 12" ☐ THREE - 25" X 12" ☐ ONE - 44" X 15" (.125" GLASS) ☐ ONE - 44" X 15" (.5" GLASS) ☐ TWO - 44" X 15" (.125" GLASS) ☐ TWO - 44" X 15" (.5" GLASS)
SEAL OPTIONS	☐ JAMB SEAL ☐ STANDARD BOTTOM SEAL ☐ TOP SEAL ☐ ELECTRIC SAFETY EDGE ☐ PNEUMATIC SAFETY EDGE ☐ VINYL STOP MOLD
LOCK OPTIONS	☐ SLIDE LOCK ☐ UNILOCK CENTER 2 ROD

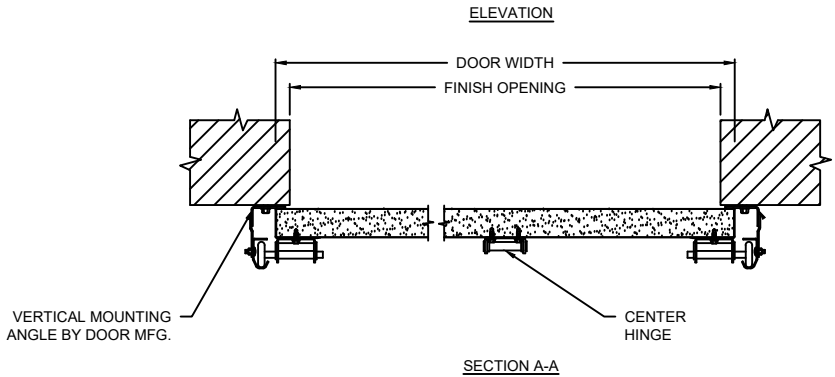

COMPONENT	MATERIAL	OPERATION	NOTES:
SECTIONS	ROLL-FORMED, HOT DIPPED, GALVANIZED	MANUAL	- THE INSULATION WILL HAVE A U-FACTOR OF 0.20 (R-VALUE OF 9.31). U-FACTOR VALUES ARE INDEPENDENTLY TESTED AND VERIFIED PER ANSI/DASMA 105. OVERHEAD DOOR™ BRAND USES A CALCULATED DOOR SECTION R-VALUE FOR OUR INSULATED DOORS. THIS DOOR FEATURES TESTED AIR INFILTRATION AT 25 MPH (40 KMPH) OF .46 CFM/FT² (8.40 M³/HR/M²).
END STILES	20 GA. STEEL		
HARDWARE	GALVANIZED STEEL		
WEATHERSTRIP	EPDM RUBBER		

THERMACORE®

598 SECTIONAL STEEL DOORS (INSULATED)

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	