




MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
850	40' 2"	24' 1"

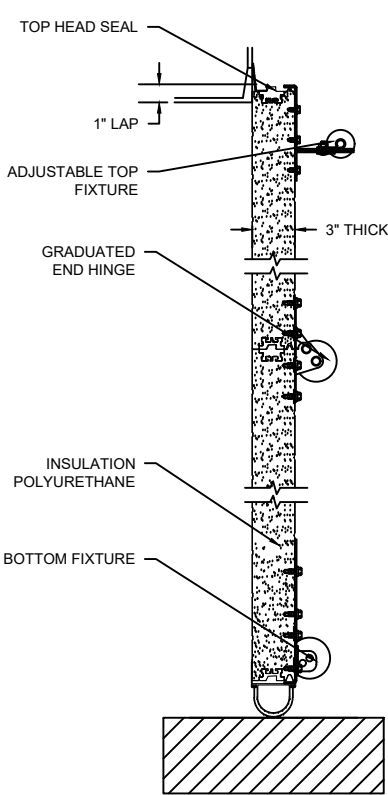

SECTION B-B

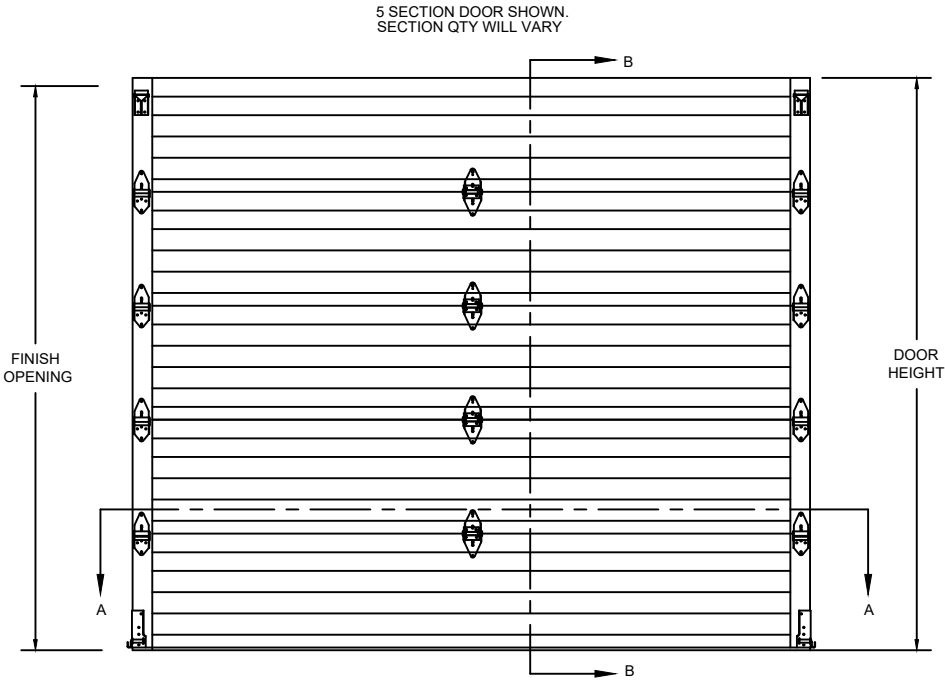

ELEVATION

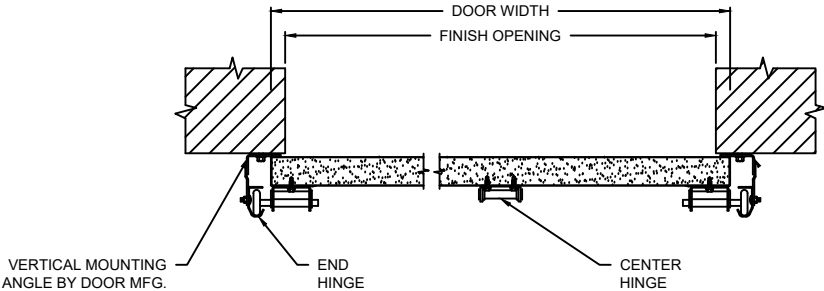

SECTION A-A

THERMACORE®

850 ADVANCED PERFORMANCE SECTIONAL STEEL DOORS
(INSULATED)

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
ROLLER TRACK SIZE	☐ 2" ☐ 3"
END STILES	☐ SINGLE ☐ DOUBLE
WINDOW OPTIONS	☐ NO WINDOW ☐ ONE - 24" X 6" ☐ TWO - 24" X 6" ☐ THREE - 24" X 6" ☐ ONE - 24" X 12" ☐ TWO - 24" X 12" ☐ THREE - 24" X 12"
SEAL OPTIONS	☐ JAMB SEAL ☐ STANDARD BOTTOM SEAL ☐ TOP SEAL ☐ ELECTRIC SAFETY EDGE ☐ PNEUMATIC SAFETY EDGE ☐ VINYL STOP MOLD

COMPONENT	MATERIAL	OPERATION	NOTES:
SECTIONS	ROLL-FORMED, HOT DIPPED, GALVANIZED	MANUAL	- THE INSULATION WILL HAVE A U-FACTOR OF 0.07 (R-VALUE OF 26.00). U-FACTOR VALUES ARE INDEPENDENTLY TESTED AND VERIFIED PER ANSI/DASMA 105. OVERHEAD DOOR™ BRAND USES A CALCULATED DOOR SECTION R-VALUE FOR OUR INSULATED DOORS. THIS DOOR FEATURES TESTED AIR INFILTRATION AT 15 MPH (40 KMPH) OF .21 CFM/FT² (3.83 M³/HR/M²).
END STILES	14 GA. /16 GA. STEEL		
HARDWARE	GALVANIZED STEEL		
WEATHERSTRIP	PVC INTERIOR, EPDM EXTERIOR		