



Z GUIDE DETAIL

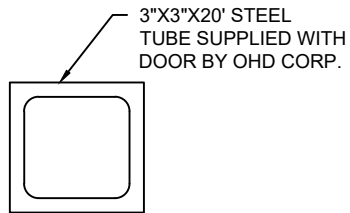

F TUBE DETAIL




C187 SLAT SECTION

C275 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

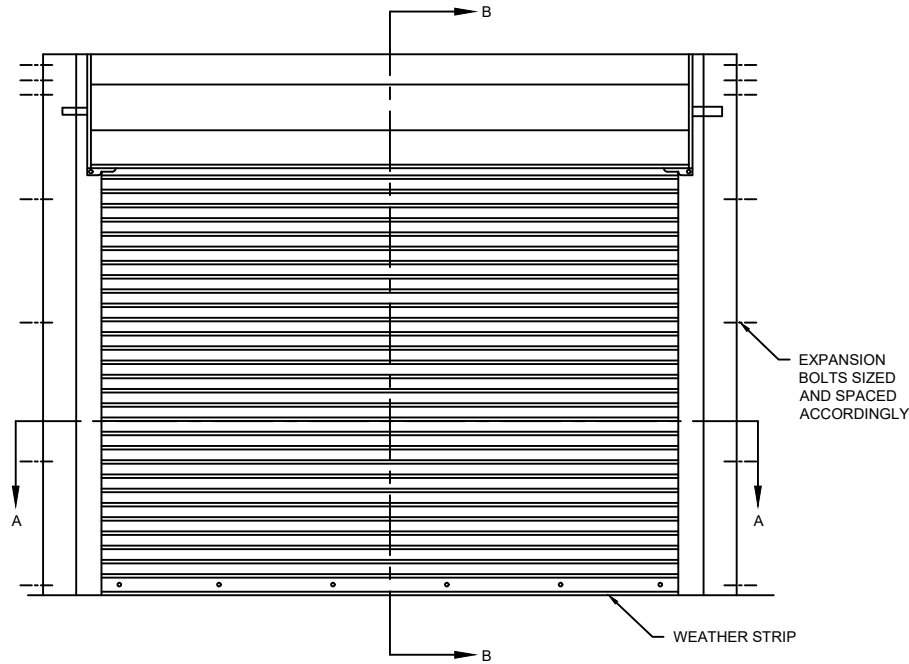


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

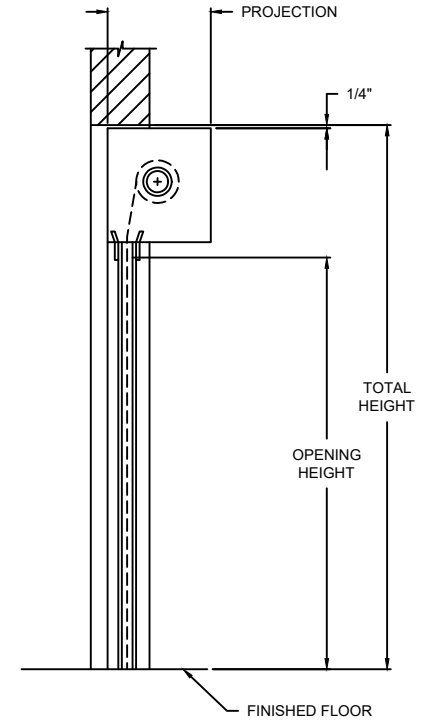

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MANUAL PUSH UP	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


HEAVY DUTY

610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR!
SHEET	BY:	



Z GUIDE DETAIL

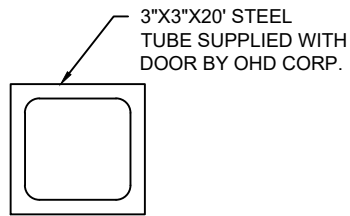

F TUBE DETAIL




C187 SLAT SECTION

C275 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

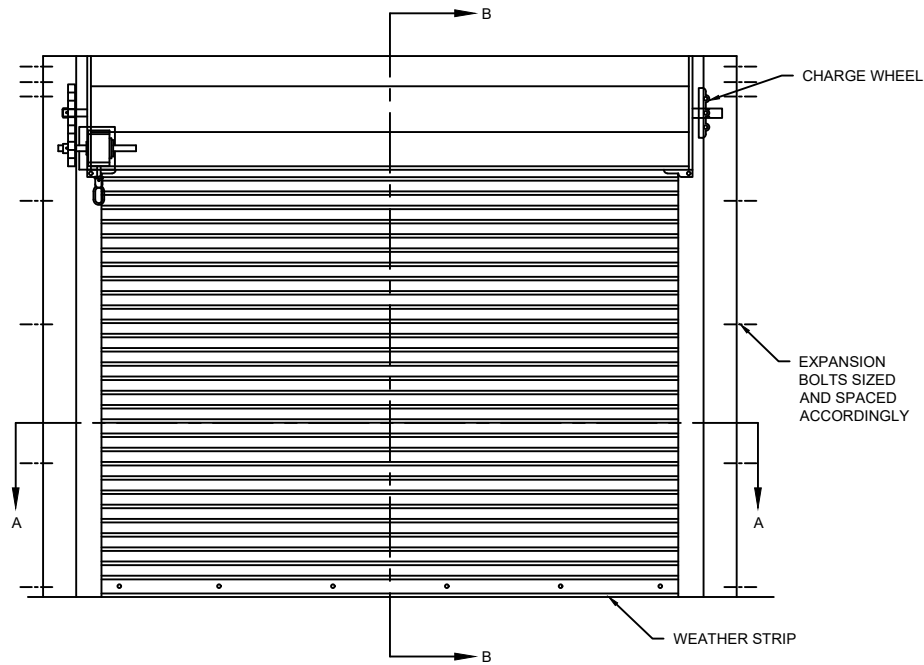


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

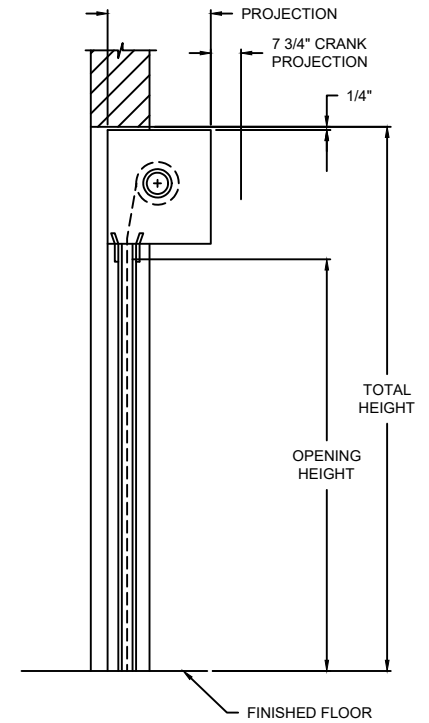

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

HEAVY DUTY


610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CRANK LH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL



F TUBE DETAIL




C187 SLAT SECTION


C275 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

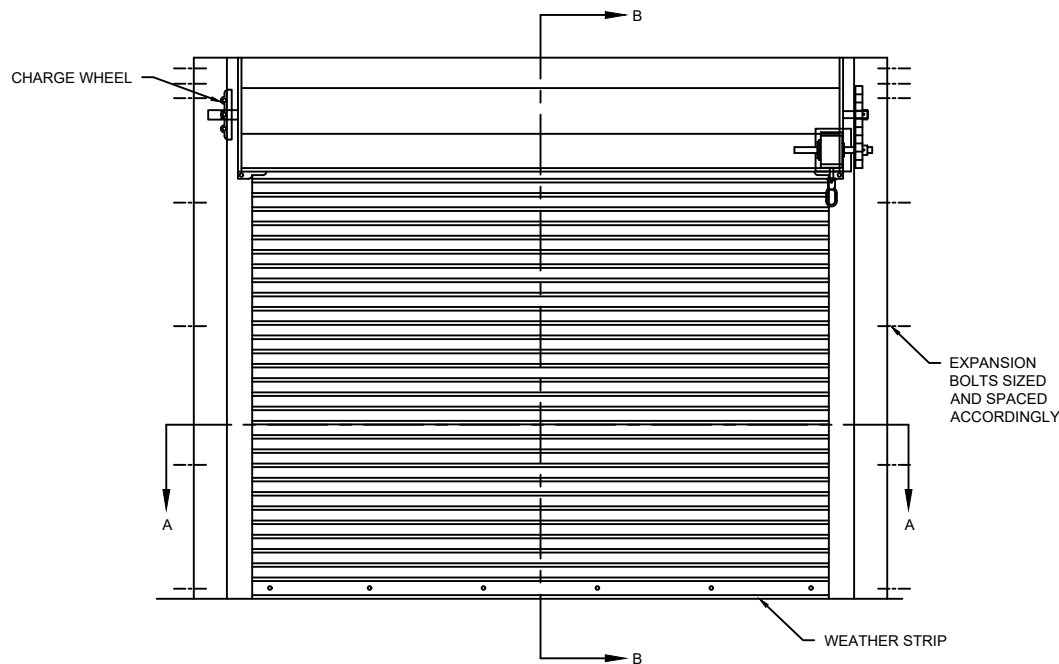


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

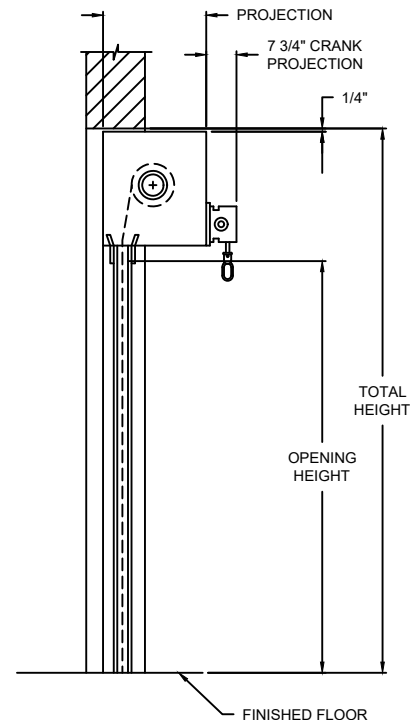

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

HEAVY DUTY


610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CRANK RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL



F TUBE DETAIL




C187 SLAT SECTION

C275 SLAT SECTION


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT
SLAT OPTIONS	☐ C187 ☐ C275


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

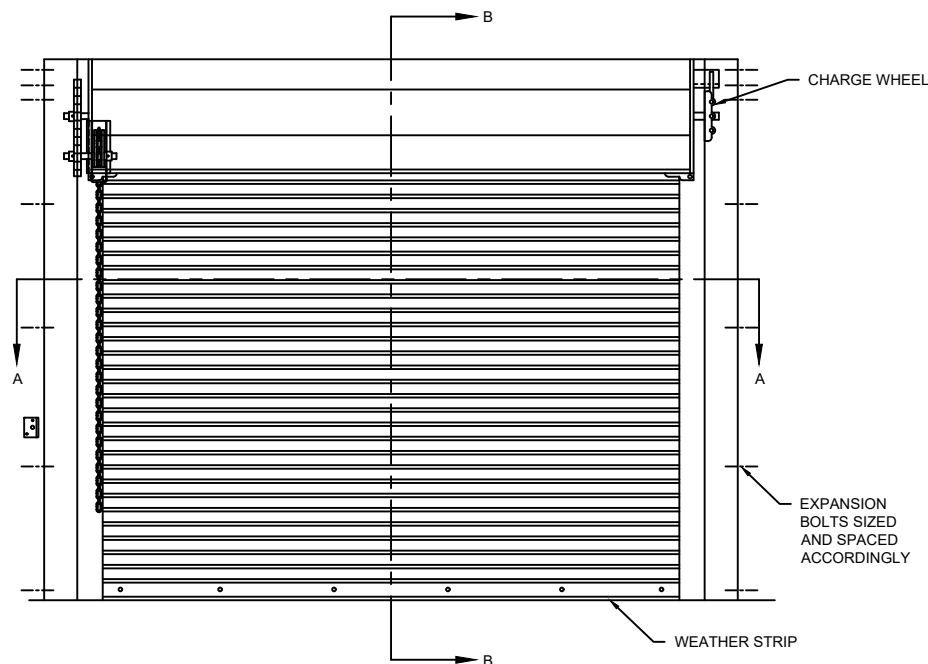

ELEVATION



SECTION A-A

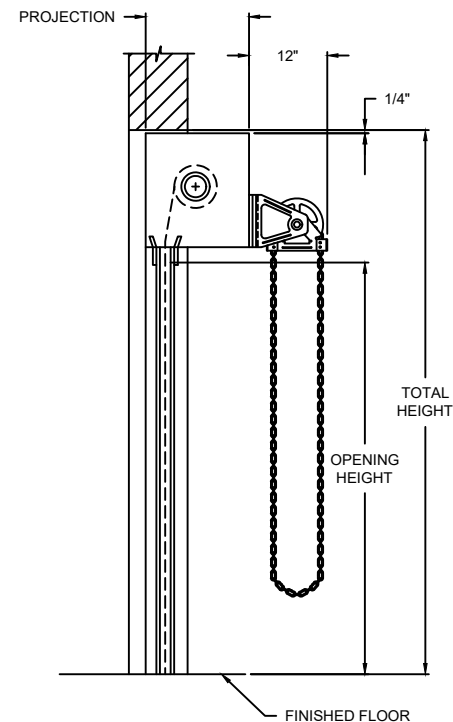

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

HEAVY DUTY


610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST LH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL



F TUBE DETAIL




C187 SLAT SECTION

C275 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT
SLAT OPTIONS	☐ C187 ☐ C275

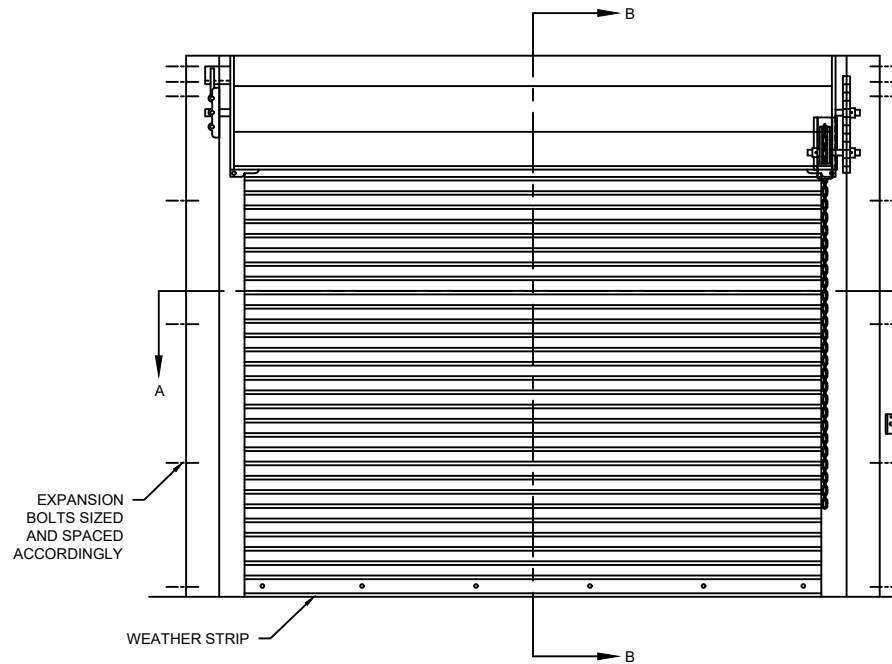


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

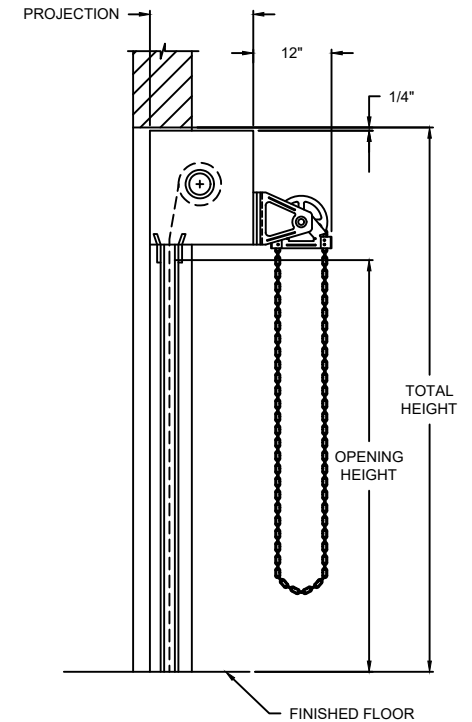

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


HEAVY DUTY

610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL



F TUBE DETAIL




C187 SLAT SECTION


C275 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

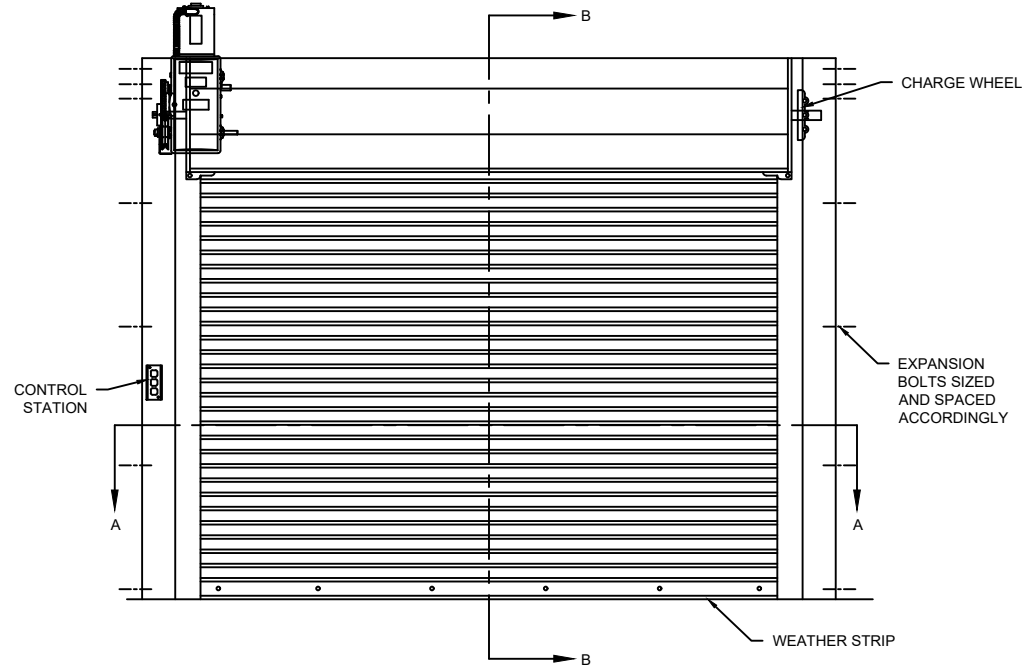


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

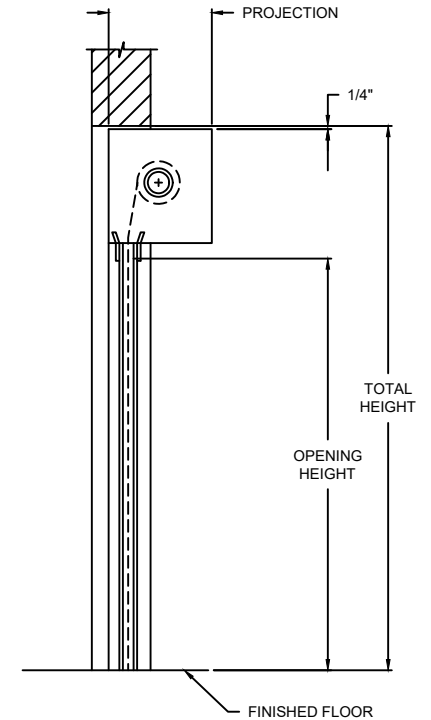

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RXH LH FOH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


HEAVY DUTY

610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL



F TUBE DETAIL




C187 SLAT SECTION

C275 SLAT SECTION


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
SLAT OPTIONS	☐ C187 ☐ C275

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610	30' 4"	28' 4"

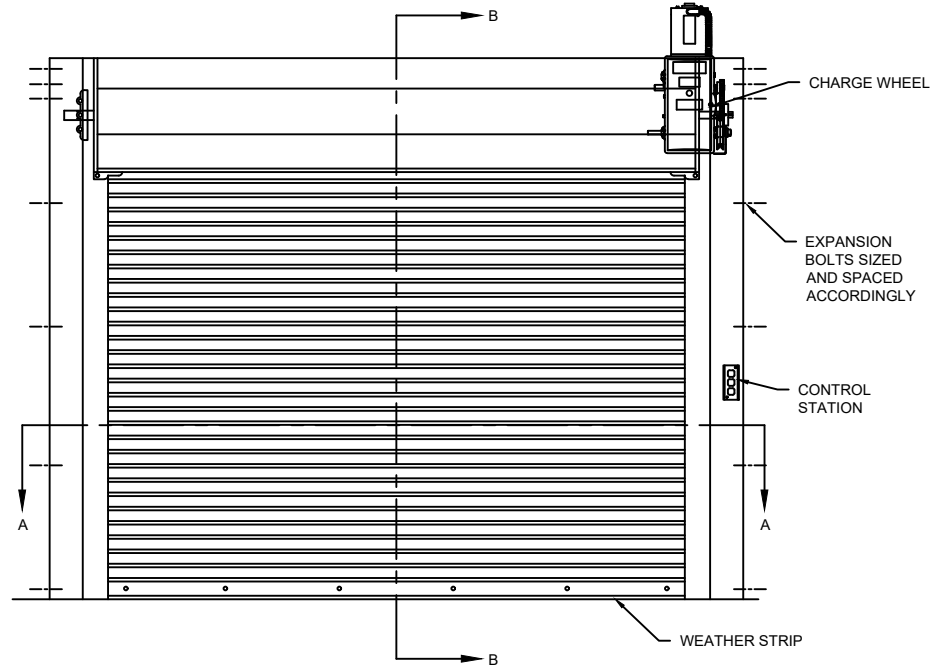


ELEVATION

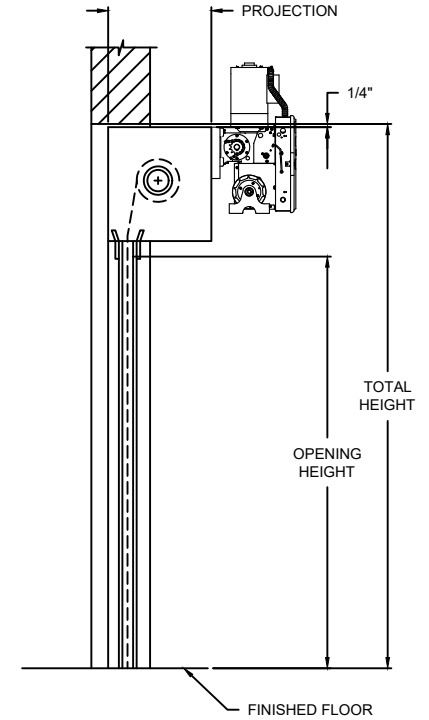

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"



SECTION A-A

HEAVY DUTY

610 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RXH RH FOH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		