



Z GUIDE DETAIL

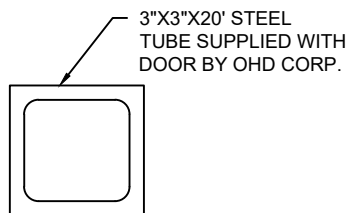

F TUBE DETAIL




F-265 SLAT SECTION


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

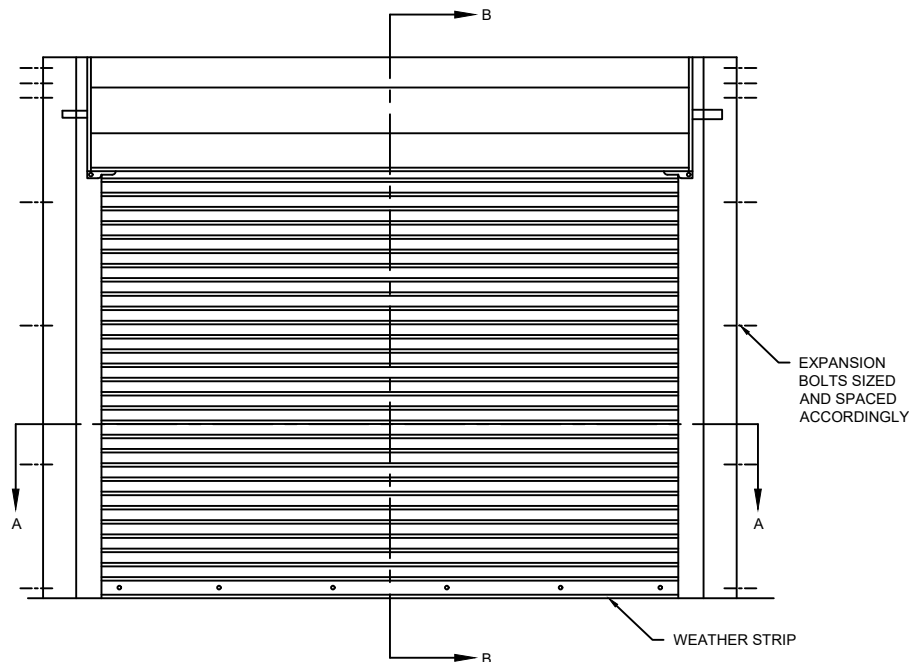

ELEVATION

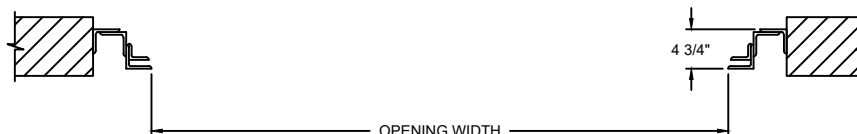

SECTION A-A

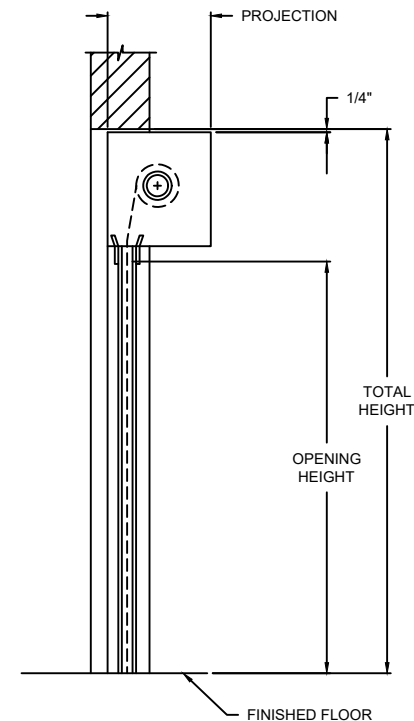

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

STORMTITE™


620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	MANUAL PUSH UP	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL

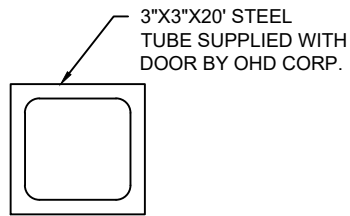


F TUBE DETAIL



F-265 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES

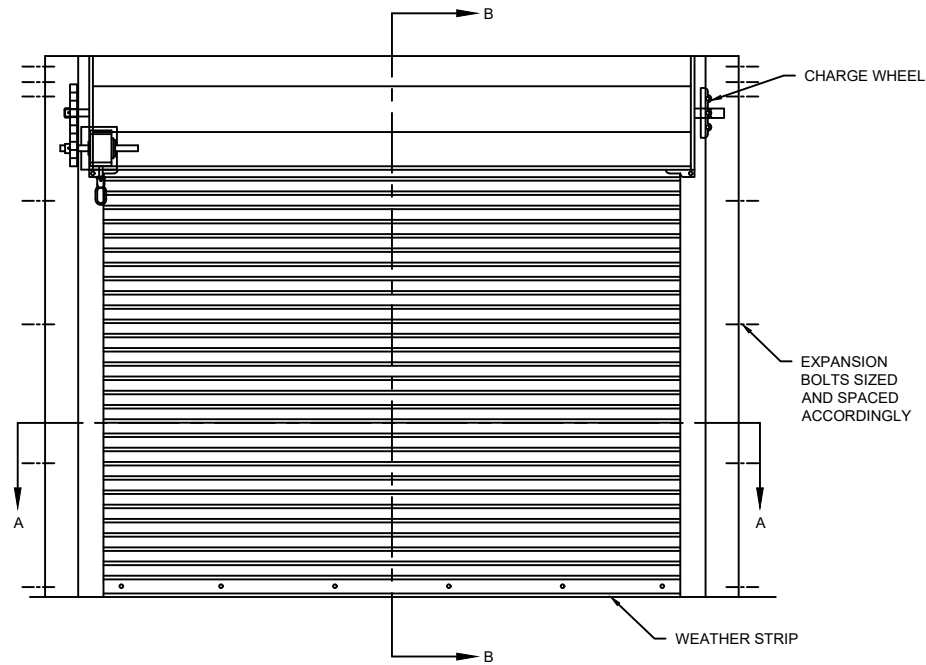


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

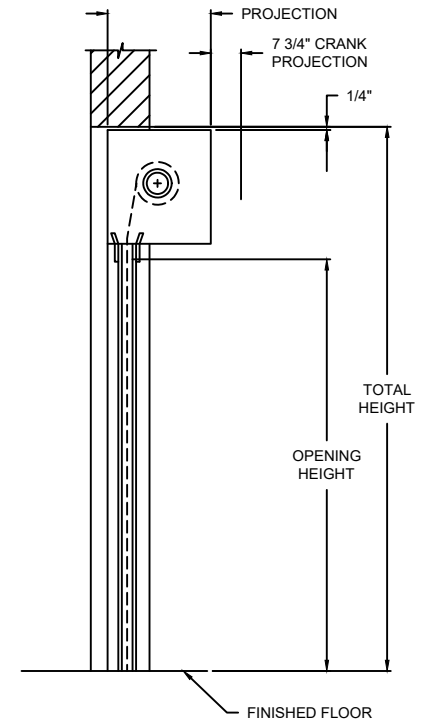

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT

MATERIAL

OPERATION

NOTES:

HOOD 24 GA. GALVANIZED STEEL

CURTAIN GA. GALVANIZED STEEL

GUIDES STEEL ANGLES

BOTTOM BAR STEEL ANGLES


CRANK LH

WIND LOAD: 20 PSF


STORMTITE™

620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL




F TUBE DETAIL




F-265 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES

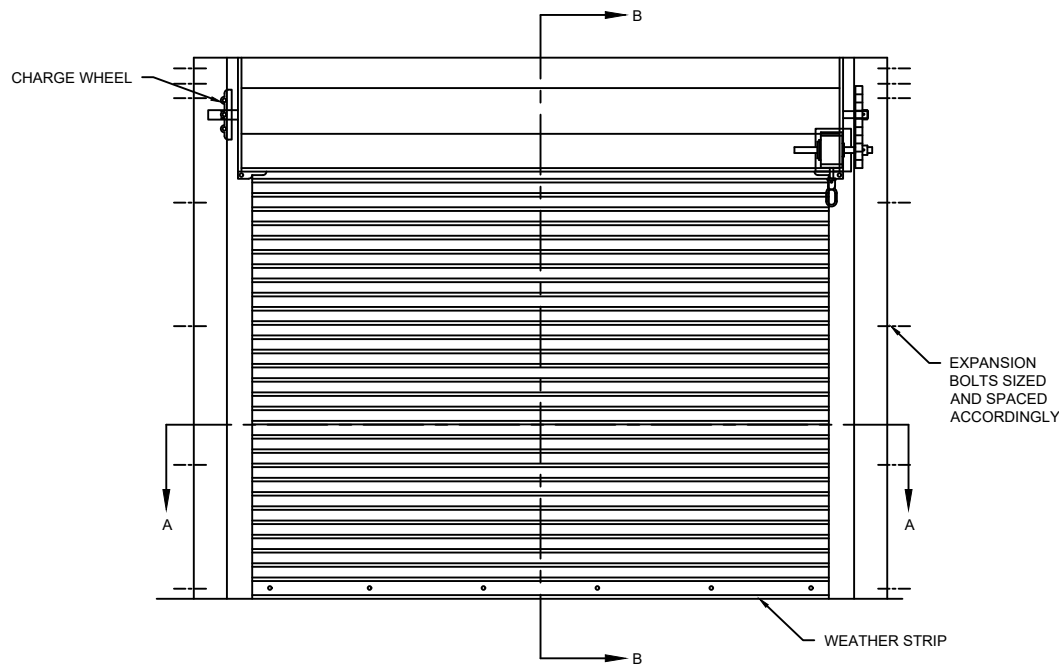


ELEVATION

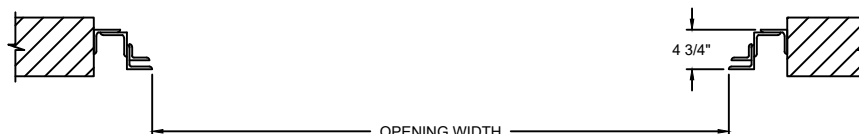

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

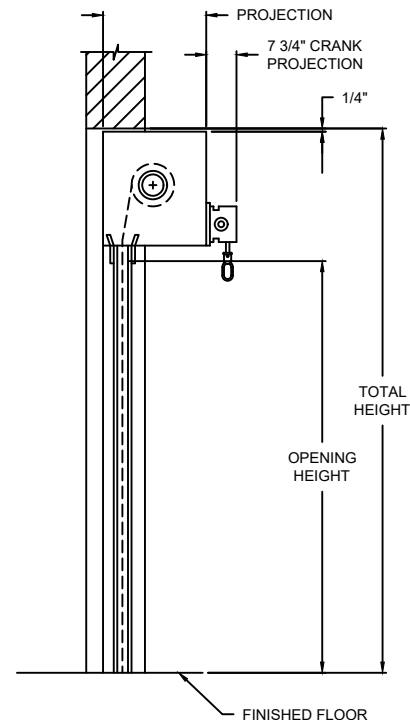

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

STORMTITE™


620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CRANK RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL



F TUBE DETAIL




F-265 SLAT SECTION


OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

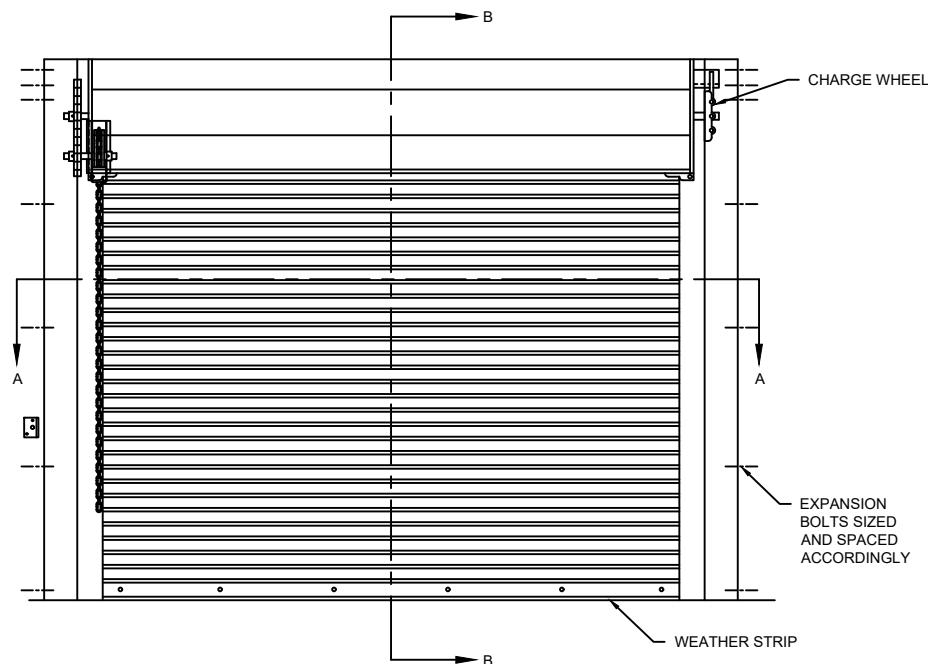

ELEVATION

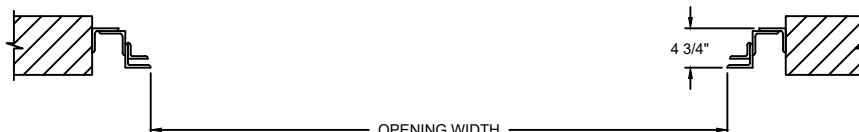

SECTION A-A

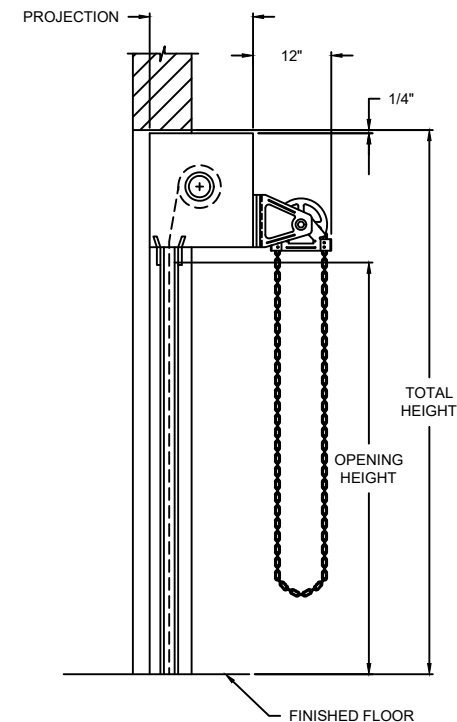

SECTION B-B


PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

STORMTITE™


620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST LH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		



Z GUIDE DETAIL




F TUBE DETAIL



F-265 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES
CHAIN HOIST COVER	☐ WITH ☐ WITHOUT

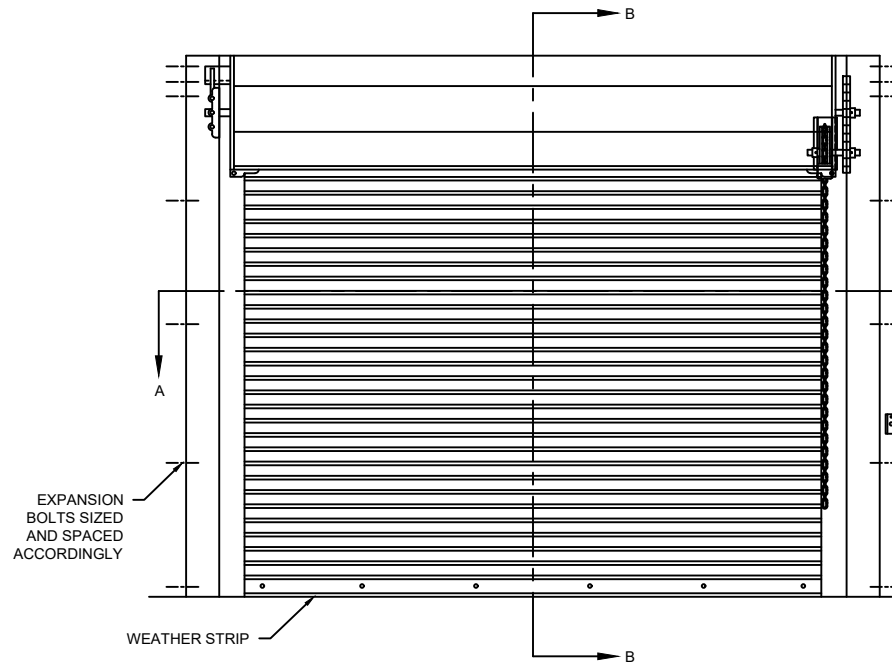


ELEVATION



SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

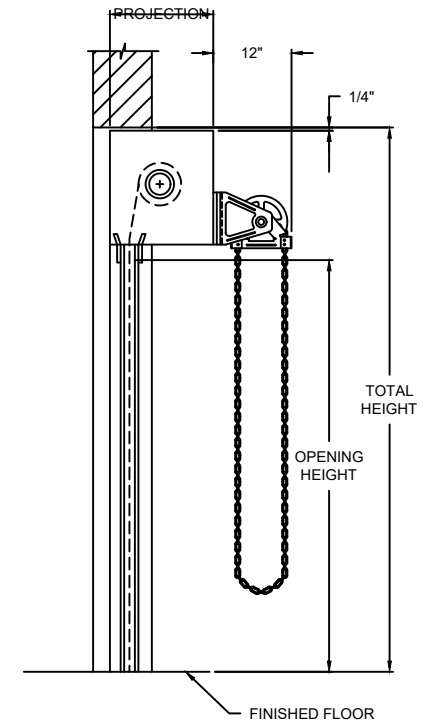

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT

MATERIAL

OPERATION


NOTES:

HOOD	24 GA. GALVANIZED STEEL	CHAIN HOIST RH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


STORMTITE™

620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL




F TUBE DETAIL




F-265 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES

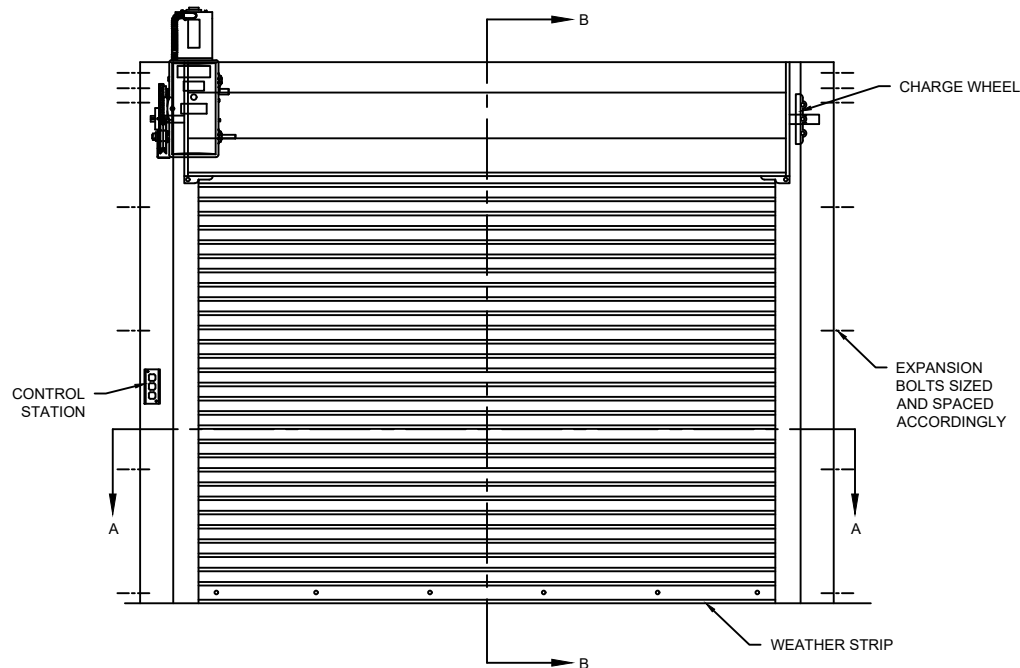


ELEVATION

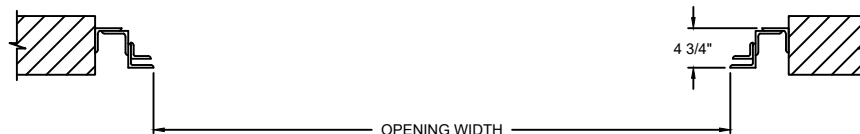

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

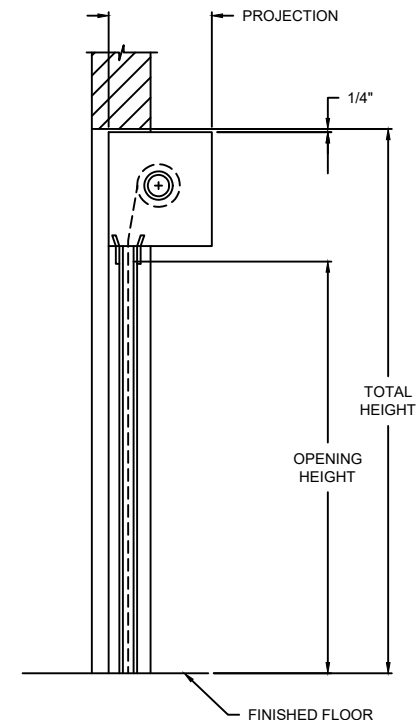

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT

MATERIAL

OPERATION


NOTES:

HOOD	24 GA. GALVANIZED STEEL	RXH LH FOH	WIND LOAD: 20 PSF
CURTAIN	GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


STORMTITE™

620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS


DWG. NO.	DATE:	The Genuine. The Original.
SHEET	BY:	



Z GUIDE DETAIL




F TUBE DETAIL




F-265 SLAT SECTION

OPTIONS

OPENING WIDTH	
OPENING HEIGHT	
HOOD OPTIONS	☐ OCTAGON ☐ ROUND
GUIDE TYPE OPTIONS	☐ F TUBES ☐ Z GUIDES

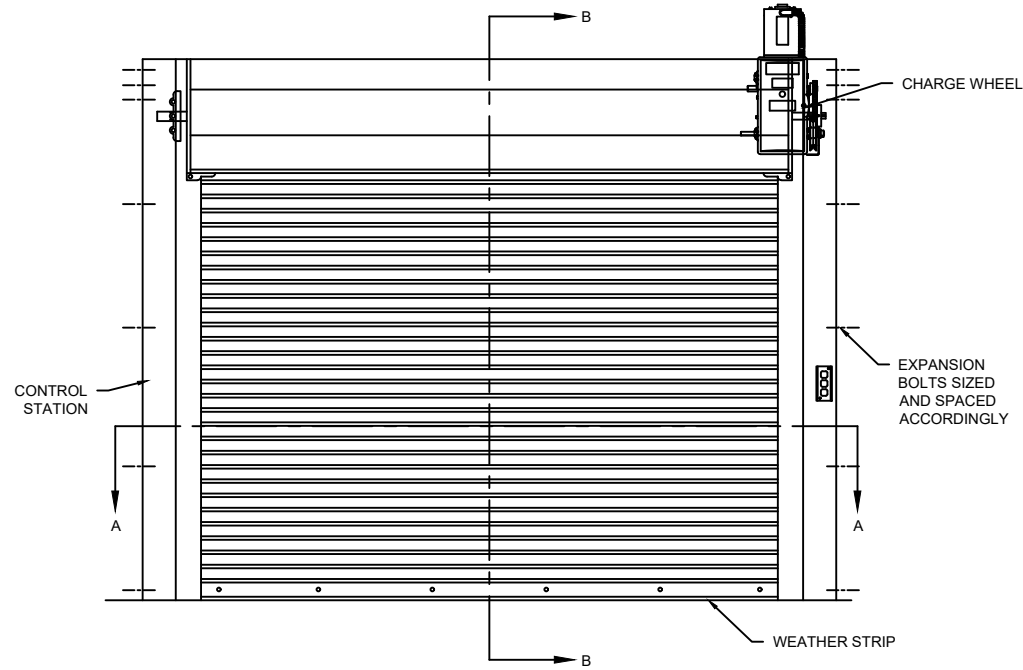


ELEVATION

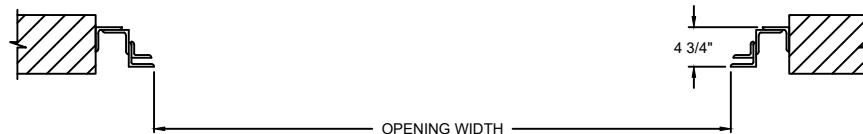

SECTION A-A

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
620	30' 4"	28' 4"

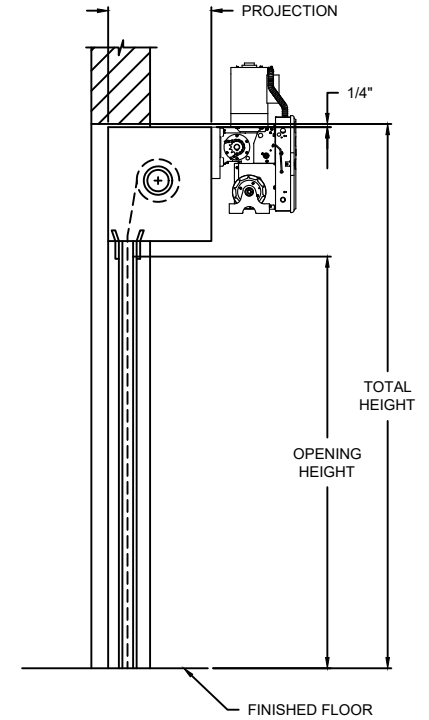

SECTION B-B

PROJECTION	
MIN.	MAX.
12" X 14"	32" X 34"

COMPONENT

MATERIAL

OPERATION

NOTES:

WIND LOAD: 20 PSF

HOOD 24 GA. GALVANIZED STEEL

CURTAIN GA. GALVANIZED STEEL

GUIDES STEEL ANGLES

BOTTOM BAR STEEL ANGLES

RHX RH FOH

STORMTITE™

620 ROLLING STEEL SERVICE DOORS - BETWEEN JAMBS

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR!
SHEET	BY:	