



COLOR OPTIONS	
GUIDES	
BOTTOM BAR	
HEADPLATES	
HOOD	
CURTAIN	
MOTOR	
VOLTS	208V AC 3-PHASE VIA TRANSFORMER
HERTZ	

DOOR MARK	QTY	OPENING SIZE		OPERATION	COMPONENT	MATERIAL	NOTES : 1. WINDLOAD 27 P.S.F ULTIMATE AT 19' WIDE
		WIDTH	HEIGHT		HOOD	22 GA. STEEL	
				MOTOR RH	CURTAIN	5 LAYERS OF NBR RUBBER WITH 4 LAYERS POLYESTER WEAVE	
					GUIDES	HIGH STRENGTH STEEL	
					BOTTOM BAR	HIGH STRENGTH STEEL DOUBLE ANGLE	

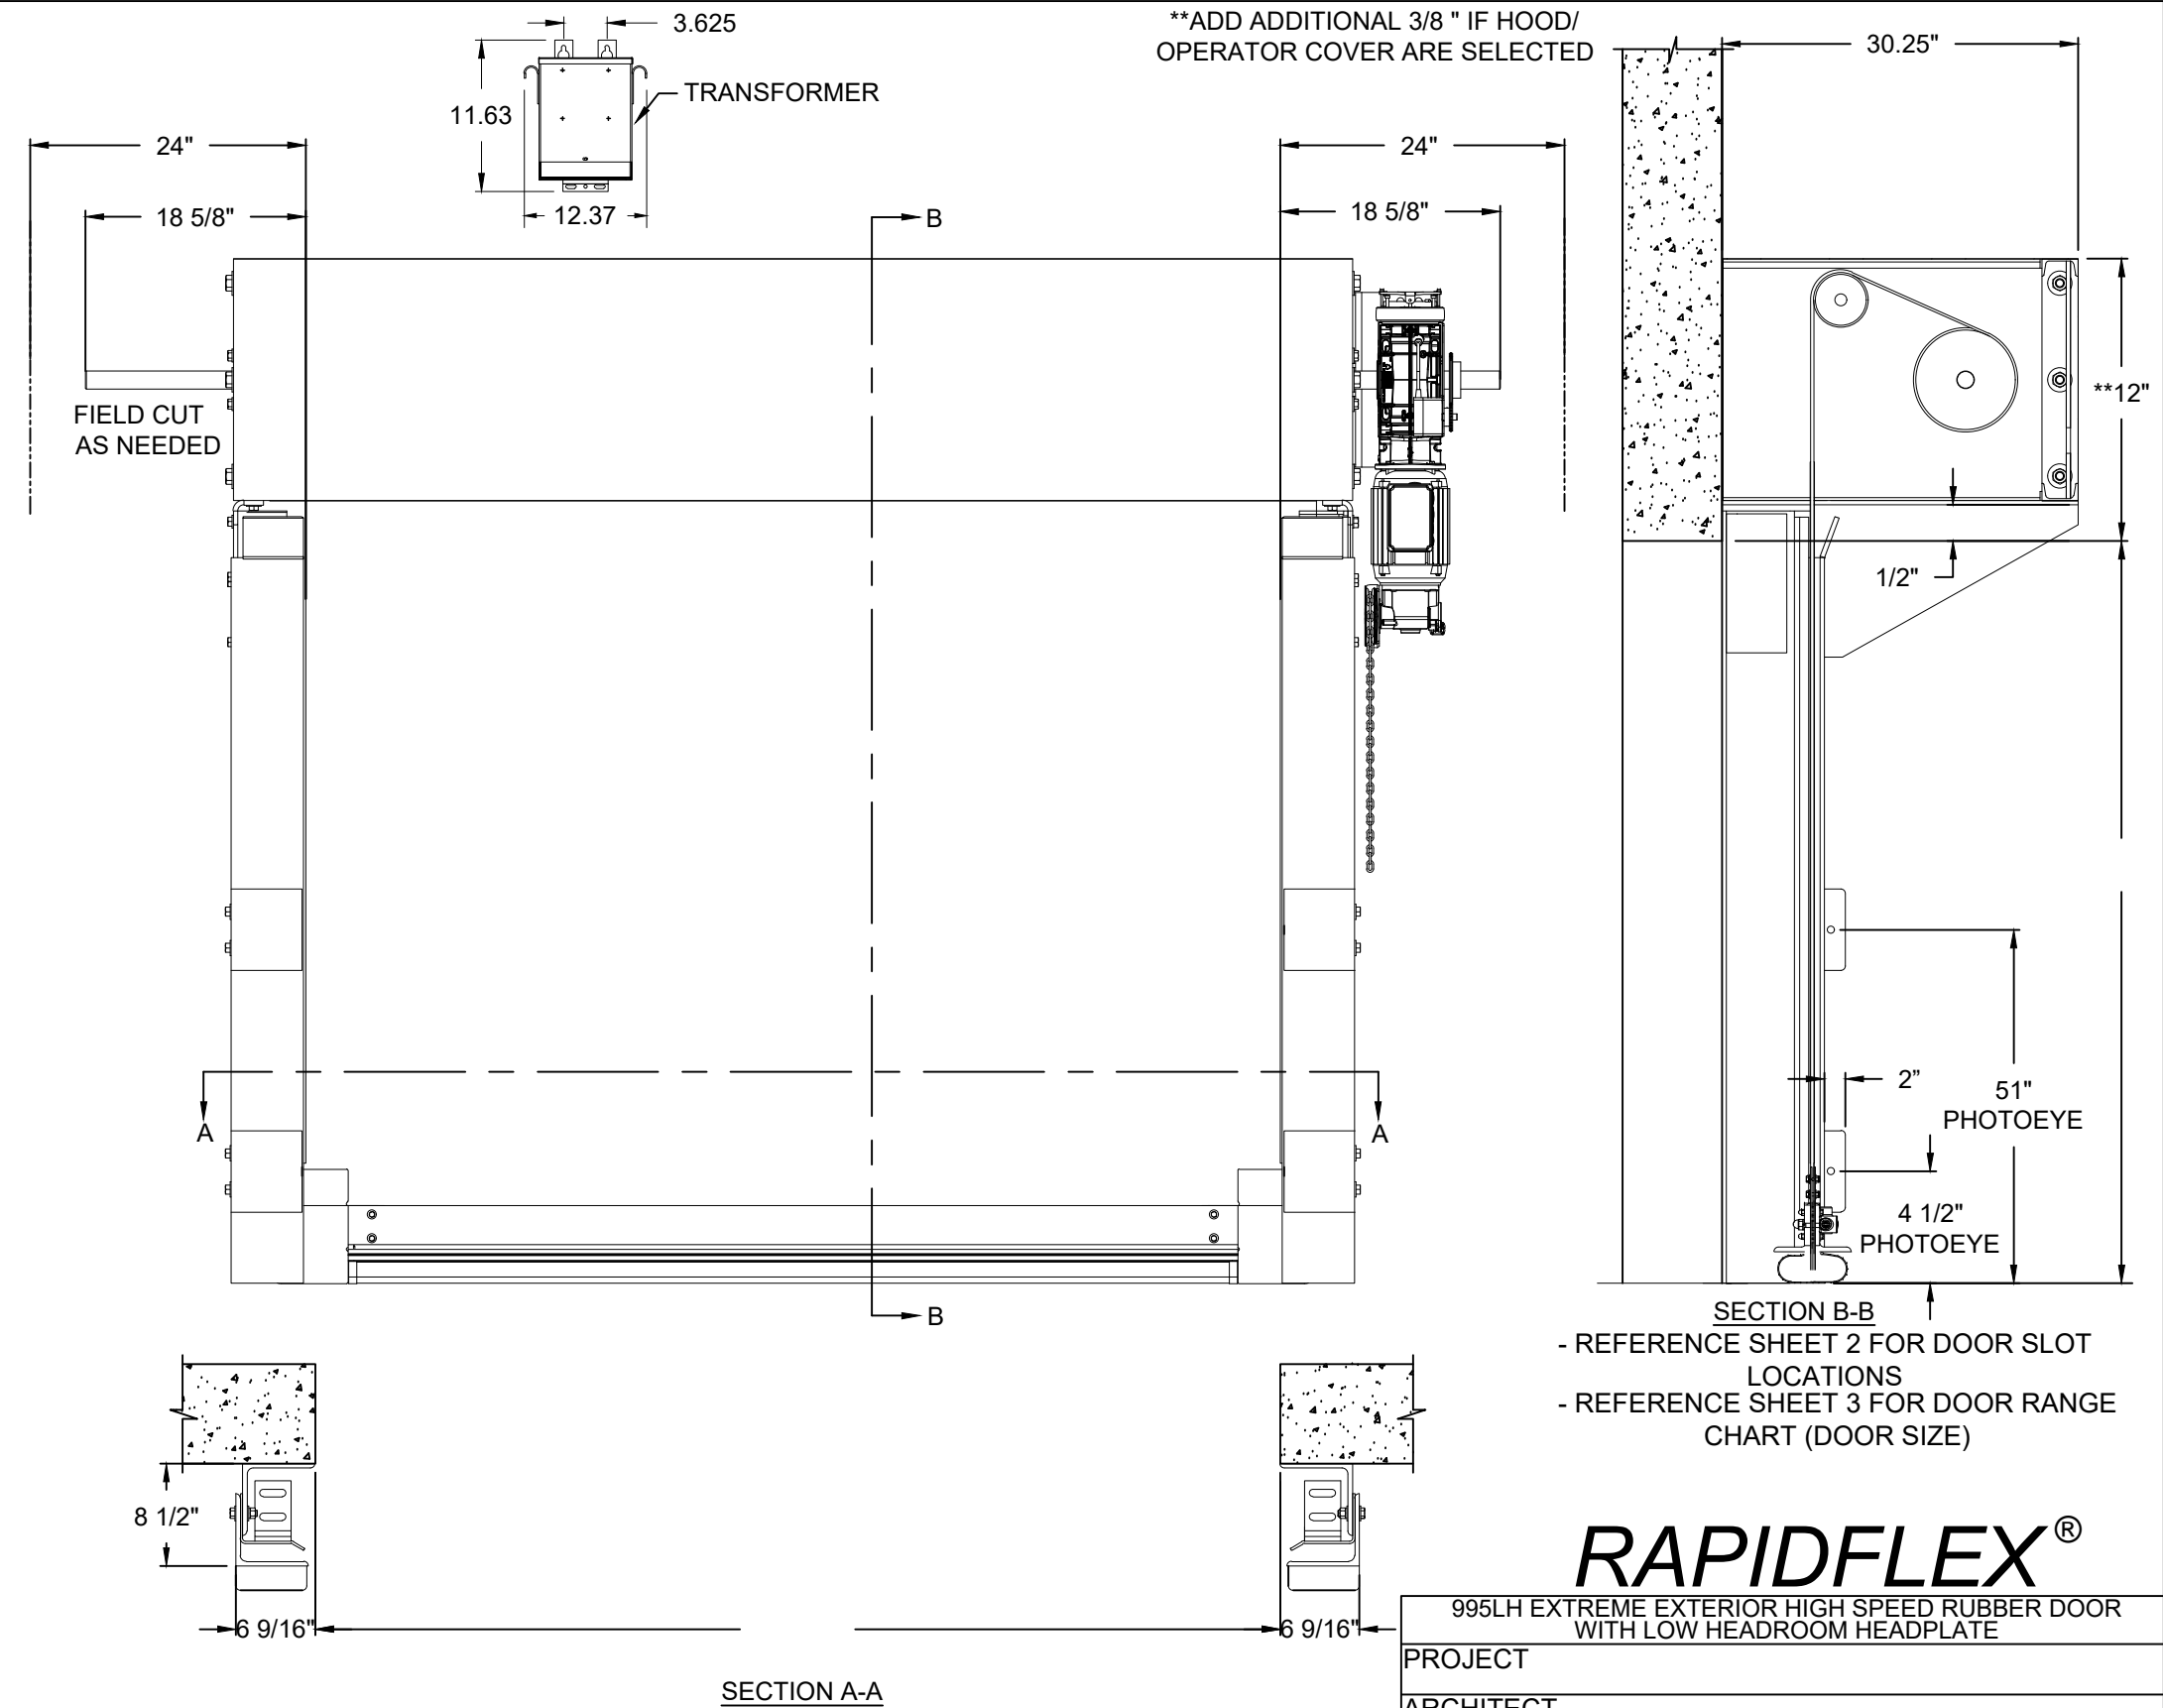

Build Height (ft)	Build Height (in)	Hole 1 (Starting from bottom)	Hole 2	Hole 3	Hole 4	Hole 5	Hole 6	Hole 7	Hole 8	Hole 9	Hole 10	Hole 11	Hole 12
6	72	3	6	24	42	49.5	52.5	54	57	62			
6.5	78	3	6	20	32	49.5	52.5	60	63	68			
7	84	3	6	20	35	49.5	52.5	66	69	74			
7.5	90	3	6	24	42	49.5	52.5	60	72	75	80		
8	96	3	6	20	32	49.5	52.5	66	78	81	86		
8.5	102	3	6	20	35	49.5	52.5	66	84	87	92		
9	108	3	6	24	42	49.5	52.5	66	78	90	93	98	
9.5	114	3	6	20	32	49.5	52.5	72	84	96	99	104	
10	120	3	6	20	35	49.5	52.5	66	78	90	102	105	110

Legend
Top Photo Eye Holes
Bottom Photo Eye Holes
Splice 0

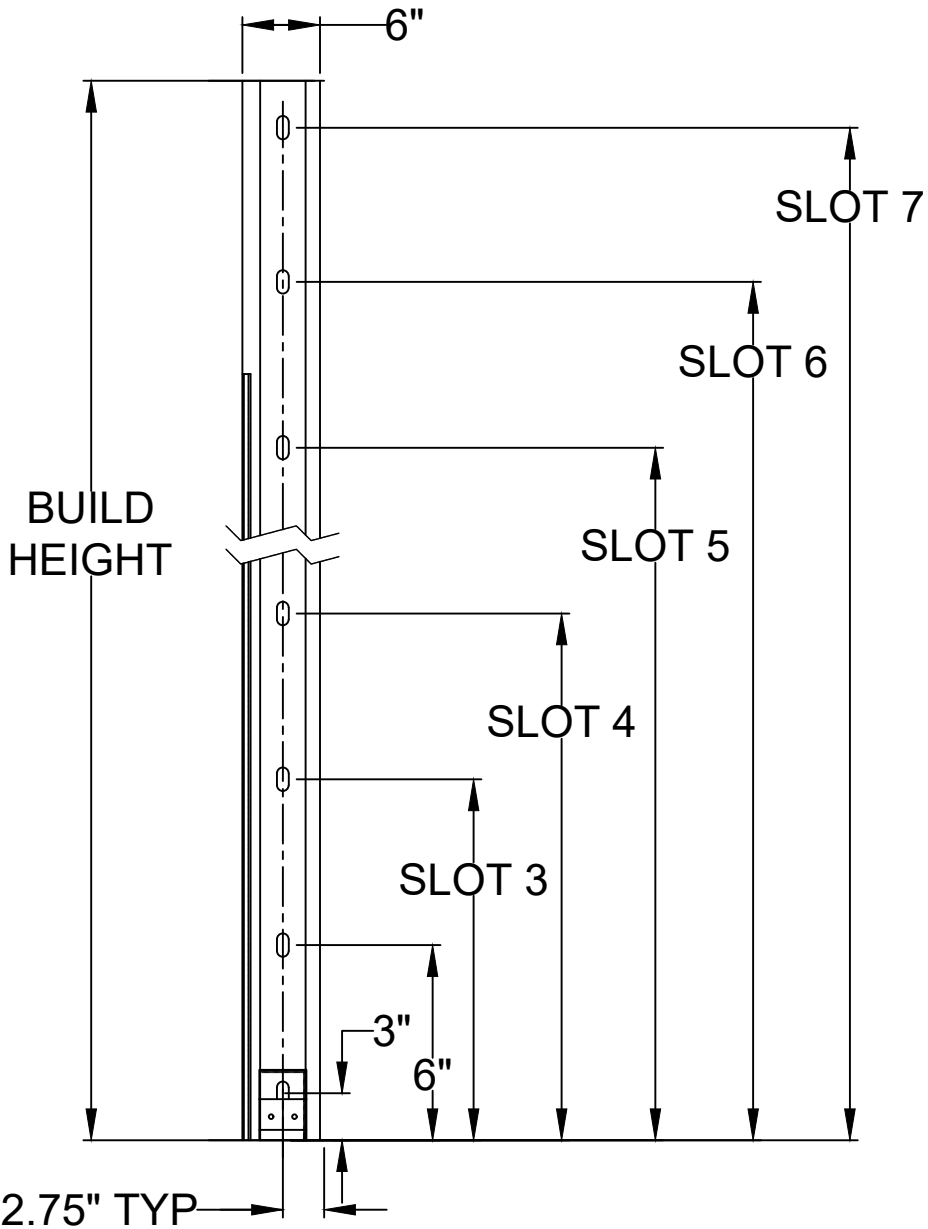

JAMB DETAIL
SHOWING 7 SLOTS


RAPIDFLEX®

995LH EXTREME EXTERIOR HIGH SPEED RUBBER DOOR WITH LOW HEADROOM HEADPLATE		
PROJECT		
ARCHITECT		
CONTRACTOR		
DISTRIBUTOR		
PLANT		
DIST. DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR®
SHEET 2 OF 3	BY:	

DOOR OPENING		Width (ft)																
		6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
Height (ft)	6																	
	7				RANGE 1							RANGE 2				RANGE 3		
	8																	
	9																	
	10																	

	12" Headroom/6.625" drive Barrel/ 4.5" Idler/SI 33.55 Operator
	13" Headroom/ 6.625" drive Barrel/ 6.625" Idler/SI 33.55 Operator
	15" Headroom/ 6.625" drive Barrel/ 6.625" Idler/SI 55.56 Operator

RAPIDFLEX[®]

995LH EXTREME EXTERIOR HIGH SPEED RUBBER DOOR WITH LOW HEADROOM HEADPLATE		
PROJECT		
ARCHITECT		
CONTRACTOR		
DISTRIBUTOR		
PLANT		
DIST. DWG. NO.	DATE:	The Genuine. The Original. 
SHEET 3 OF 3	BY:	